




W-DA301


Digital AC Ammeter I Ø
Code : 3203

- Type of display: 7 segment
- Supply voltage: 220 VAC
- Input signal: AC current
- Measuring range: 1-8000 A
- Use with current transformer: X/5A
- Accuracy class 0.5
- Specially: can be set up CT ratio from 1A to 8000/5A

Operation Front Panel

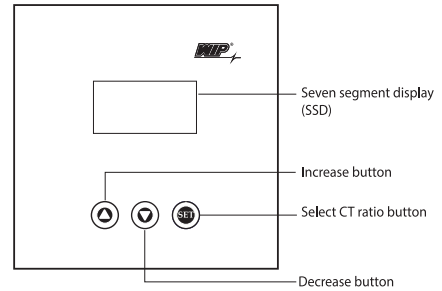

Diagram

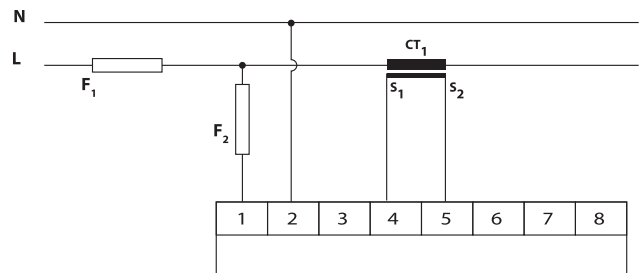

Specification

Feature	
Supply voltage	: 220 VAC 50/60 Hz.
Power consumption	: 2VA
Accuracy	: ± 0.5% full scale+1 Count
Display	: 4 digits 7-segment Red LED Letter 0.56" (14.20 mm)
Range	
Input signal	: AC current
Measuring range	: 1-8000 A
Use with	current transformer : X/5A
Environmental	
Operating temperature:	-10° to +55°C
Storage temperature :	-10° to +70°C
Ambient humidity :	Max 85%RH
Enclosure	
Mounting	: Flush panel mount with mounting bracket Panel cut-out 84 x 84 mm.
Housing	: Black ABS plastic
Wire fixing	: Screw terminal block (3.5mm ² self lifting)
Dimension (mm)	: 105 x 105 x 65
Weight	: 267 g.

Dimension in mm.

